



53 Ubi Avenue 1 #03-42  
 Paya Ubi Industrial Park  
 Singapore 408934  
 Tel: 6749 3003 Fax: 6742 3003



新加坡水处理协会  
 Ordinary Member


www.hitechaem.com  
 contact@hitechaem.com  
 ROC No: 199205407G  
 GST No.M2-0109882-3

## Faucet Mount “Hollow Fiber Membrane Filter”

**Standard Type** with  
**1,500L** filtration capacity

# torayvino® MK303

Easy-to-use 360°  
 rotational lever



### See-through Window

Remove the filter cap to check if contaminants have built-up. By doing so, you know when it's time to replace the cartridge.



Before use



After use (rust)

### The 4-Stage Filtration

Four-stage filtration catches even the most microscopic contaminants.

#### 1. Pre screen

Removes rust particles, sediment, silt and suspended matters.

#### 2. Granular activated carbon

Torayvino MK303 uses high performance activated carbon to remove chlorine, organic chemicals, bad taste and odour

#### 3. Second screen

Removes rust, sediment and bigger particles.

#### 4. Multilayer Hollow Fiber membrane filter

Toray's advanced multilayer hollow fiber membrane filters remove cyst, bacteria, coliform bacilli, microorganisms and microscopic impurities from water and other liquid solutions without removing calcium, magnesium and other minerals essential to the human body.

The same membrane technology is used in dialysis to purify blood in the medical field.



torayvino. RUHENS





53 Ubi Avenue 1 #03-42  
 Paya Ubi Industrial Park  
 Singapore 408934  
 Tel: 6749 3003 Fax: 6742 3003




新加坡水处理协会  
 Ordinary Member

www.hitechhaem.com  
 contact@hitechhaem.com  
 ROC No: 199205407G  
 GST No.M2-0109882-3

## 99.99% bacteria removal !

Other important minerals that are essential to our body are retained.

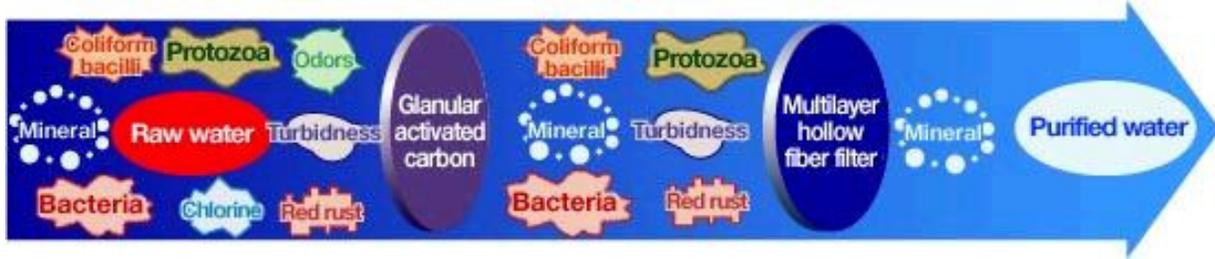

## Details specifications for MK 303

- Model.....MK303-EG
- Casing materials.....Polyacetal, ABS resin
- Filter materials..... Granular activated carbon, polysulfone hollow fiber membrane
- Initial filtration flow rate ..... 2.0 liters per minute (water pressure: 100kPa)
- Minimum working water pressure ..... 70kPa
- Recommended cartridge use duration ..... About 3 months if 15 liters are used per day



- Filtration capacity
  - Free residual chlorine: total filtration volume 1500 liters, removal rate 80%
  - Turbidity: total filtration volume 2000 liters, filtration flow rate 50%

## Replacement cartridge for MK303 (Model : MKC-EG)



torayvino. RUHENS

